



Zertifiziertes
QM-System
DIN EN ISO 9001
Zertifikat-Nr. 01017

Magnetic Inductive Flowmeter for conductivity liquids



measuring
•
monitoring
•
analysing

PIT



- Measuring range: up to 10 m/s
- Accuracy:
±1.5% of reading
± 0.5% of full scale
- p_{max} : PN 40; t_{max} : -40 ... +150 °C
- Connection:
flange DN 40 ... 80,
ANSI 2" ... 3"
- Material:
stainless steel/PTFE or PFA
- Outputs: analogue with HART®,
pulse and status

SS



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY,
GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS,
PERU, POLAND, REPUBLIC OF KOREA, RUSSIA, SPAIN, SWITZERLAND, THAILAND, TUNISIA,
TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



Description

An electrically conductive medium induces a voltage while flowing through an arranged magnetic field in accordance to the Faraday's induction law. The electrode current is proportional to the flow velocity and therewith to the volume flow. The PIT-sensor is available with integral or remote mount transmitter. A retracting device for mounting and dismounting under process conditions is available.

The magnetic-inductive PIT flow velocity sensor is used to measure or monitor the volume flow of liquids, slurries, pastes and other electrically conductive media while minimizing pressure drop.

Pressure, temperature, density and viscosity do not affect the volume measurements. Portions of solid particles and small gas pockets should be avoided.

The PIT has following significant characteristics

- Wide variety of wetted materials
- Electrodes in Hastelloy®, tantalum, platinum and other materials available
- Retracting device for use under process conditions

Technical Details

Sensor

Material armature: stainless steel/PTFE, PFA
 Material electrodes: Hastelloy®, tantalum, platinum, other materials on request

Wetted parts

Outer sensor tube: stainless steel, PTFE
 Measuring and grounding electrodes: standard: Hastelloy® C4
 special: tantalum, titanium

Non-wetted parts

Sensor flange: stainless steel
 Welding sleeve and flange: stainless steel
 Sensor neck: stainless steel
 Terminal box for remote mount sensor and transmitter: aluminium pressure casting, painted

Process connection: flanges acc. EN 1092, ASME B16.5, DIN 2512, special connections on request
 Nominal pressure: PN 16, ASME C1150 (stainless steel/PTFE)
 PN 40, ASME C1150/300 (PFA) higher pressures on request
 Process temperature: integrated transmitter
 -20°C ... +80°C (st. st./PTFE)
 -20°C ... +80°C (PFA)
 remote mounted transmitter
 -40°C ... +100°C (st. st./PTFE)
 -40°C ... +150°C (PFA)
 Ambient temperature: -40 ... +60 °C
 Protection: IP 67 / IP 68 (EN 60529)
 Range of application for sizes: DN 125 ... DN 2000 (stainless steel/PTFE), DN 125 ... DN 600 (PFA)

Ex-approval and sensor markings

Explosion protection:



BVS 03 ATEX E 150 X
 II 2G Ex e [ia Ga] IIC T6-T3 Gb



IECEx BVS 12.0034 X
 Ex e [ia Ga] IIC T6-T3 Gb



NEPSI GYJ17.1207X
 Ex e [ia Ga] IIC T6-T3 Gb

Adjustable upper range values

Standard: 1 ... 10 m/s
 Special: 0.5 ... 5 m/s
 Conductivity: ≥ 20 µS/cm (50 µS/cm for demineralised water)

Transmitter

Mounting: integral or remote
 Power supply: 115 / 250 V_{AC}
 24 V_{DC}
 Outputs: 1 x 0(4) - 20 mA
UMF2 (only without ATEX)
 Code »F«: current output: 0)4-20 mA
 pulse output: passive U_m = 24 V_{DC}
 status output: passive U_m = 24 V_{DC}
 Code »G«: current output: 0)4-20 mA with HART®
 pulse output: passive U_m = 24 V_{DC}
 status output: passive U_m = 24 V_{DC}
UMF3
 Code »A« standard: not intrinsically-safe
 1 x current output:
 4-20 mA (passive) HART®
 1 x pulse output:
 1 kHz, passive 24 V_{DC} (U_m = 30 V_{DC})
 1 x status output:
 passive 24 V_{DC} (U_m = 30 V_{DC})



Technical Details (continued)

Code »C« standard: intrinsically-safe
 1 x current output:
 4-20 mA (passive) HART®
 1 x pulse output:
 1 kHz, passive 24 V_{DC} (U_m = 30 V_{DC})
 1 x status output:
 passive 24 V_{DC} (U_m = 30 V_{DC})

Ambient temperature: -20 ... +60 °C

Protection: IP 68 (EN 60529)

Communication: HART®

Accuracy: ± 1.5 % of reading
 ± 0.5 % adjusted full scale
 (under reference conditions)

Repeatability: ± 0.75 % of reading
 ± 0.25 % adjusted full scale
 (under reference conditions)

Protection Class Markings

Transmitter mounted as compact version

Ex d e ib [ia IIC Ga] IIB T4/T3 Gb
 Ex tb ib [ia Da] IIIC T125 °C/T150 °C Db
 Ex d e ib IIB T4/T3 Gb
 Ex tb ib IIIC T125 °C/T150 °C Db

Separately mounted transmitter with terminal box

Ex d e [ib Gb] [ia IIC Ga] IIB T4/T3 Gb
 Ex tb [ib Db] [ia Da] IIIC T125 °C/T150 °C Db
 Ex d e [ib IIB] T4/T3 Gb
 Ex tb [ib] IIIC T125 °C/T150 °C Db

Separately mounted transmitter with pigtail cable (max. 10 m)

Ex d ib [ia IIC Ga] IIB T4/T3 Gb
 Ex tb ib [ia Da] IIIC T125 °C/T150 °C Db
 Ex d ib IIB T4/T3 Gb
 Ex tb ib IIIC T125 °C/T150 °C Db

Approval Certificate



BVS 15 ATEX E 067 X



IECEx BVS 15.0120 X



NEPSI GYJ17.1208X
 NEPSI GYJ17.1209X

Order Details Sensor for UMF2 (Example: PIT-S 317B 163 H 0 1 0 0 0K) (continuation next page)

Model/ material/version	Process connection flange	Sensor length	Elektrodes material	Measuring range/medium velocity	Sensor configuration	Approvals
PIT-S³⁾ = stainless steel (1.4571/1.4404)/ PTFE for nominal diameters DN125 - DN2000 (PN16) (PIT-520)	317B = DN40 PN40 form B1 DIN EN 1092-1 321B = DN50 PN40 form B1 DIN EN 1092-1 326B¹⁾ = DN65 PN40 form B1 DIN EN 1092-1 331B = DN80 PN40 form B1 DIN EN 1092-1 206R = 2" Class 150 RF ASME B16.5-2003	163 = 163 mm XXX⁴⁾ = special length	H = Hastelloy® C-4 T = tantalum (only for model PIT-A) N = platinum (only for model PIT-A)	0 = 1-10 m/s L = 0,5 - 5 m/s	1 = integrated transmitter, IP67 4²⁾ = remote mounted transmitter, IP67 5²⁾ = remote mounted transmitter, IP68	0 = without
PIT-A = PFA for nominal diameters DN125 - DN600 (PN40) (PIT-571) with grounding electrode	208R = 3" Class 150 RF ASME B16.5-2003	XXX⁴⁾ = special length				
PIT-U³⁾ = stainless steel (1.4571/1.4404) for nominal diameters DN125 - DN2000 (PN40) (PIT-571) model including installation/extraction device, mounting adaptor and valve						

¹⁾ Not for PIT-A (PFA)

²⁾ Order cable and cable glands separately

³⁾ Without grounding electrode

⁴⁾ 3 digits in mm (PIT-S: DN700-DN1200 = 263, DN1400-DN2000 = 363). PIT-U: sensor length must be calculated (see manual)



Order Details Sensor (continued)

Certificates	Supplementary equipment
0 = without 1 = certificate of compliance with the order, 2.1 2 = test report, 2.2 B = inspection certificate with material certificate 3.1 C = inspection certificate with material certificate 3.2	OK = without XK = special version

Order Details Transmitter UMF2 (Example: UMF2- A 1 1 F0BK)

Model	Mounting/ thread for cable gland	Display-/ interface board	Power supply	Outputs/version	Interconnecting cable
UMF2-	A = integrated transmitter IP67 standard / ½" NPT (f) B = integrated transmitter IP67 standard / M20x1.5 C = remote transmitter incl. tube/wall mounting bracket, cable >10 m with box to transmitter / ½" NPT (f) D = remote transmitter incl. tube/wall mounting bracket, cable >10 m with box to transmitter / M20x1.5 G = remote transmitter incl. tube/wall mounting bracket, connecting box to transmitter standard / ½" NPT (f) H = remote transmitter incl. tube/wall mounting bracket, connecting box to transmitter standard / M20x1.5	1 = with display/ interface board	1 = 230 V _{AC} (+10%, -15%), 50/60 Hz 2 = 115 V _{AC} (+10%, -15%), 50/60 Hz 4 = 24 V _{DC} (±15%)	F0BK = analogue output 1: 0(4)-20 mA pulse output: passive, U _m =24 V _{DC} status output: passive, U _m =24 V _{DC} G0BK = analogue output 1: 0(4)-20 mA with HART®-protocol pulse output: passive, U _m =24 V _{DC} status output: passive, U _m =24 V _{DC}	Compact version 0 = no cable Remote version (cable prefabricated on transmitter) IP67 0 = 2,5 m standard (on remote version) 1 = 5 m 2 = 10 m Remote version (junction box on transmitter) IP67 3 = 15 m 4 = 20 m 5 = 30 m 6 = 40 m 7 = 50 m IP68¹⁾ A = 2,5 m standard (on remote version) B = 5 m remote version C = 10 m remote version D = 15 m remote version E = 20 m remote version F = 30 m remote version G = 40 m remote version H = 50 m remote version

¹⁾ Only with mounting option G and H



Order Details Sensor for UMF3 (Example: PIT-S 317B 163 H 0 1 E 0 0K)

Model/ material/version	Process connection	Sensor length	Electrodes material	Measuring range/medium velocity	Sensor configuration	Approvals
PIT-S¹⁾ = stainless steel (1.4571/1.4404)/ PTFE for nominal diameters DN125 - DN2000 (PN16) (PIT-520)	317B = DN40 PN40 form B1 DIN EN 1092-1 standard 321B = DN50 PN40 form B1 DIN EN 1092-1	163 = 163 mm (up to diame- ters <DN600)	H = Hastelloy® C-4	0 = 1-10 m/s L = 0,5 - 5 m/s	1 = integrated transmitter, IP67 3 = remote trans- mitter IP65, (junction box on transmitter)	E = ATEX + IEC Ex - gas Ex B = NEPSI
PIT-A = PFA for nominal diameters DN125 - DN600 (PN40) (PIT-571) with grounding electrode	206R = 2" Class 150 RF ASME B16.5- 2013 326B²⁾ = DN65 PN40 form B1 DIN EN 1092-1 331B = DN80 PN40 form B1 DIN EN 1092-1	XXX³⁾ = special length	T = tantalum (only for model PIT-A) N = platinum (only for model PIT-A) X = special on request			
PIT-U¹⁾ = stainless steel for nominal diameters DN125 - DN2000 (PN16) model including installation/ex- traction device, mounting adaptor and valve	208R = 3" Class 150 RF ASME B16.5-2013	XXX³⁾ = special length				

¹⁾ Without grounding electrode

²⁾ Not for PIT-A (PFA)

³⁾ 3 digits in mm (PIT-S: DN700-DN1200 = 263, DN1400-DN2000 = 363). PIT-U: sensor length must be calculated (see manual)

Order Details Sensor for UMF3 (continued)

Certificates	Supplementary equipment
0 = without 1 = works certificate 2.1 2 = works certificate 2.2 B = material certificate 3.1 incl. material analysis (DIN EN 10204:2004) C = material certificate 3.2 incl. material analysis (DIN EN 10204:2004)	0K = without XK = with (separate specification needed)



Order Details Transmitter UMF3 (Example: UMF3- 1 A 3 A 1 1K 1)

Model	Power supply	Transmitter layout	Approval	Output	Transmitter design	Threads for cable entries (signal and power supply)
UMF3-	1 = 90-253 V _{AC} , 50/60 Hz 2 = 24 V _{DC} ± 20 %	A ¹⁾³⁾ = compact mounting C ¹⁾⁵⁾ = junction box (intrinsically safe)	3 = NEPSI A = ATEX + IEC EX - Gas Ex	A = standard: 1 x current output: 4-20 mA (passive) HART® 1 x pulse output: 1 kHz, passive 24 V _{DC} (U _m = 30 V _{DC}) 1 x status output: passive 24 V _{DC} (U _m = 30 V _{DC}) (not intrinsically-safe)	1 = compact mounted transmitter IP67 3 = remote transmitter IP65 (junction box on transmitter)	1K = M20x1,5 (Ex-proof and not Ex-proof) 3K = ½" NPT(f) Ex d (via adaptor)
		B ²⁾⁴⁾ = compact mounting D ²⁾⁶⁾ = junction box (not intrinsically safe)		C = standard: 1 x current output: 4-20 mA (passive) HART® 1 x pulse output: 1 kHz, passive 24 V _{DC} (U _m = 30 V _{DC}) 1 x status output: passive 24 V _{DC} (U _m = 30 V _{DC}) (intrinsically-safe)		

Order Details Transmitter UMF3 (continued)

Interconnecting cable
0 = none (compact version) 1 = 2,5 m standard (on remote version) 2 = 5 m remote version 3 = 10 m remote version 4 = 15 m remote version 5 = 20 m remote version 6 = 30 m remote version 7 = 40 m remote version 8 = 50 m remote version

¹⁾ Protection signal output: intrinsically-safe
²⁾ Protection signal output: not intrinsically-safe
³⁾ Certification marking: output C; Ex d e ib [ia IIC Ga] IIB T4-T3 Gb; Ex tb ib [ia Da] IIIC T125°C/T150°C Db
⁴⁾ Certification marking: output A; Ex d e ib IIB T4-T3 Gb; Ex tb ib IIIC T125°C/T150°C Db
⁵⁾ Certification marking: output C; Ex d e [ib Gb] [ia Ga] IIB T4-T3 Gb; Ex tb [ib Db] [ia Da] IIIC T125°C/T150°C Db
⁶⁾ Certification marking: output A; Ex d e [ib] IIB T4-T3 Gb; Ex tb [ib] IIIC T125°C/T150°C Db



Order Details Welding Socket

Order number	Version
60 020 621	stainless steel (1.4571 / 1.4404), DN40 PN40 DIN/EN1092, standard length
60 020 328	stainless steel (1.4571 / 1.4404), DN50 PN40, standard length
60 018 833	stainless steel (1.4571 / 1.4404), 2" Class 150 RF ASME B16.5-2013, standard length
60 019 917	stainless steel (1.4571 / 1.4404), DN65 PN16, standard length for installation- /extracting device, on PIT-U included
60 020 405	stainless steel (1.4571 / 1.4404), DN80 PN40, standard length
60 019 025	stainless steel (1.4571 / 1.4404), 3" Class 150 RF ASME B16.5-2013, standard length
X	special on request

Screws on request

Order Details Installation-, Extracting Device


Model	Version	Length
PIT - EWVS	valve lock 1.4408 (ball valve + mounting socket, DN40 PN40 to DN65 PN16) welding socket not included	
PIT - EVDS1G	pressure screw (standard) for use with remote mounted version only	$l \leq 1000$ mm
PIT - EVDS1A	pressure screw (standard) for use with integrated mounted version only	$l \leq 1000$ mm
XX	special on request	

For mounting the installation-, extracting device following things are necessary:


Sensor in special version PIT-U326B, welding socket 60019917, valve lock PIT-EVVS and pressure screw set PIT-EVD...

Dimensions [mm]


UMF2-transmitter compact version

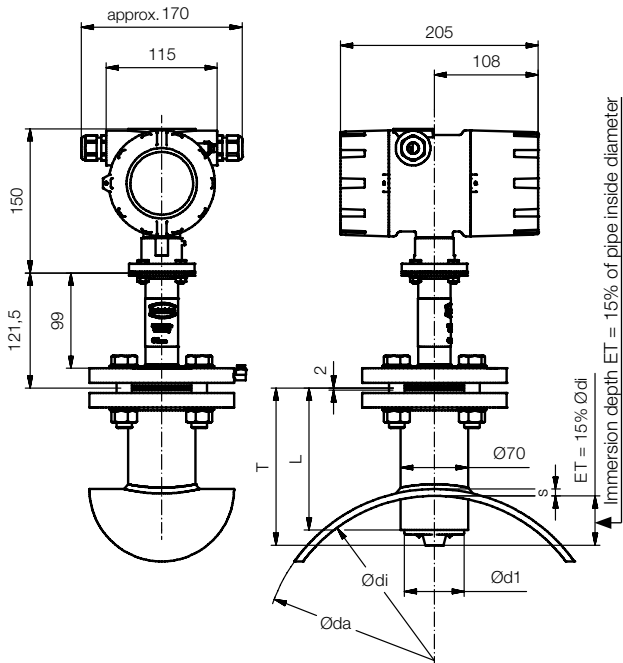


Sensor remote version

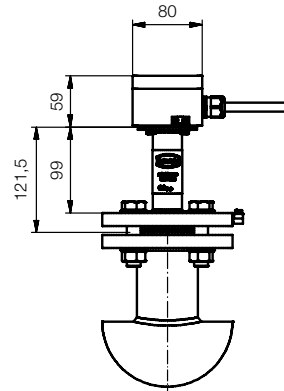

UMF2-remote transmitter (up to 10 m cable)

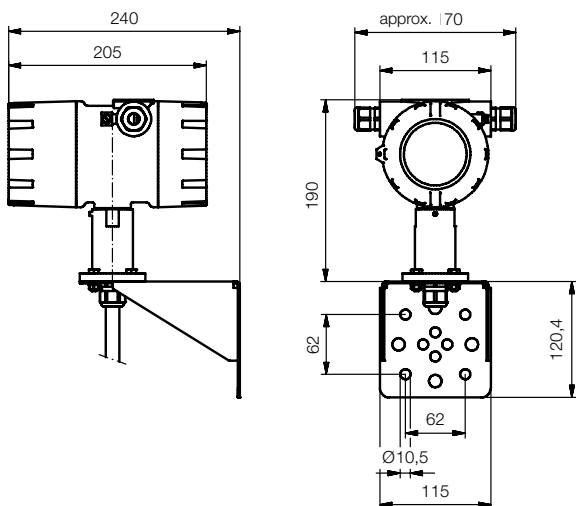

UMF2-remote transmitter with connecting box

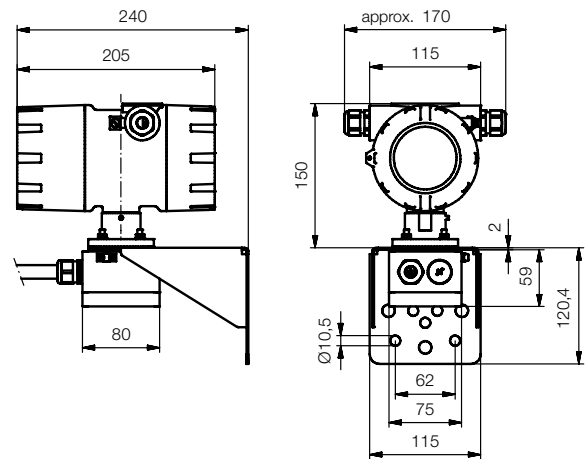


Model	DN	T	Ød1	L
PIT-A (PFA)	150 - 600	163 mm	62 mm	145 mm
PIT-S (SS/PTFE)	150 - 600	163 mm	60.3 mm	145 mm
PIT-S (SS/PTFE)	700 - 1200	263 mm	60.3 mm	170 mm
PIT-S (SS/PTFE)	1400 - 2000	363 mm	60.3 mm	170 mm




Dimensions [mm] (continued)

UMF3 transmitter with terminal box and wall bracket for separate montage
(Dimensions also apply for the UMF3 transmitter with pigtail cable)

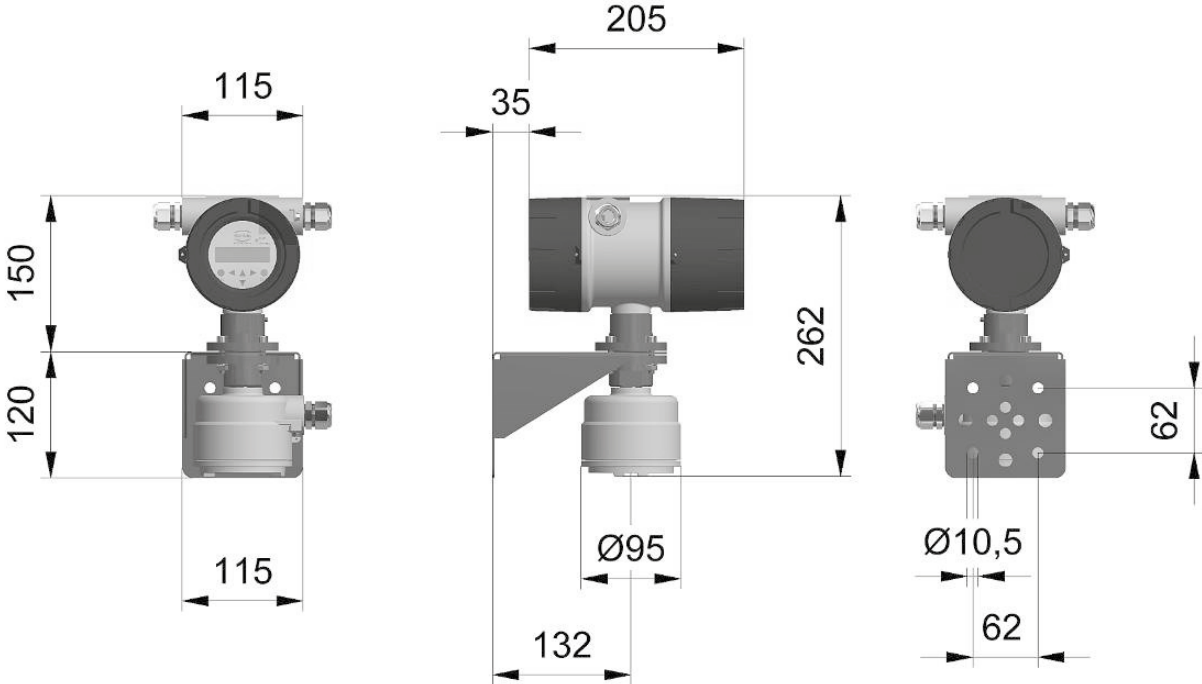

Dimensions [mm] (continued)


PIT-S with terminal box for separate montage

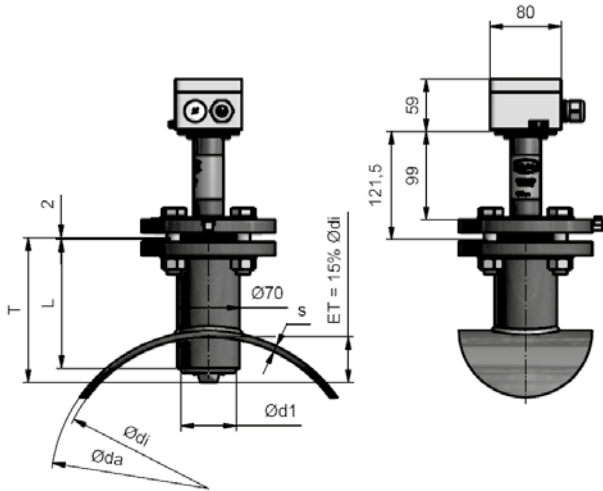

- IP67 terminal connection box: 57 x 75 x 80 mm
 Weight: 3.6 kg
 DN: nominal diameter
 T: length of sensor
 Ød: diameter of sensor
 L: length of socket weld fitting
 ET: immersion depth in % of pipe diameter

Version	DN	T [mm]	Ød1 [mm]	L [mm]
PIT-A (PFA)	150-600	163	62	145
PIT-S (SS/PTFE)	150-600	163	60.3	145
PIT-S (SS/PTFE)	700-1200	263	60.3	170
PIT-S (SS/PTFE)	1400-2000	363	60.3	170

PIT-S dimensional drawing with direct mounted transmitter UMF3

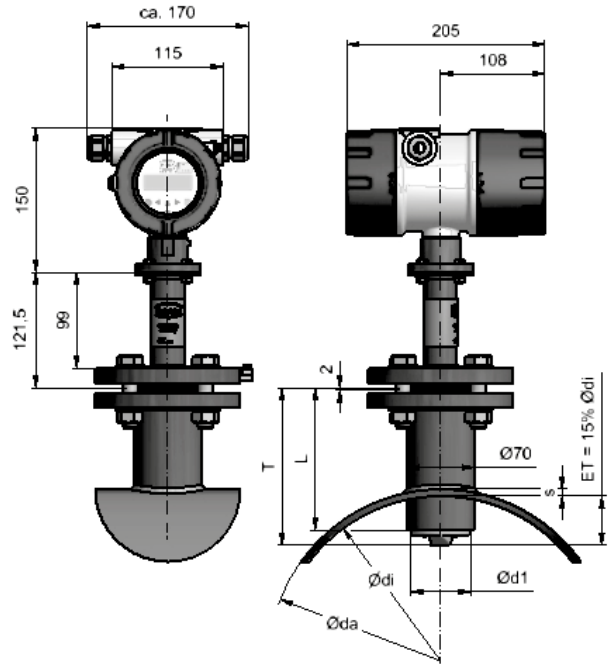

- Weight: 5.5 kg
 DN: nominal diameter
 T: length of sensor
 Ød: diameter of sensor
 L: length of socket weld fitting

Version	DN	T [mm]	Ød1 [mm]	L [mm]
PIT-A (PFA)	150-600	163	62	145
PIT-S (SS/PTFE)	150-600	163	60.3	145
PIT-S (SS/PTFE)	700-1200	263	60.3	170
PIT-S (SS/PTFE)	1400-2000	363	60.3	170