

**overview**

- 20 ... 1000 mm
- voltage output
- qTeach, line-Teach
- connector M12 5 pin
- -25 ... 65 °C
- IP 69



**Technical data**

**general data**

scanning range Sd	20 ... 1000 mm
scanning range close limit Sdc	20 ... 1000 mm
scanning range far limit Sde	20 ... 1000 mm
repeat accuracy	< 0,5 mm
resolution	< 0,3 mm
response time ton	< 40 ms
release time toff	< 40 ms
temperature drift	< 2 % of distance to target So
power-up drift	compensated after 15 min.
sonic frequency	200 kHz
adjustment	qTeach, line-Teach
alignment aid	light indicator flashing
light indicator	LED yellow
power on indication	LED green
alignment measuring axis	< 2°

**electrical data**

voltage supply range +Vs	12 ... 30 VDC
current consumption typ.	35 mA

**electrical data**

output circuit	voltage output
output signal	0 ... 10 V / 10 ... 0 V
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND


**mechanical data**

type	cylindrical threaded
housing material	stainless steel (V2A) / TR90
coating active face	PEEK
width / diameter	18 mm
height / length	64 mm
connection types	connector M12 5 pin


**ambient conditions**

operating temperature	-25 ... +65 °C
storage temperature	-40 ... +75 °C
protection class	IP 69
protection class (connection)	IP 67


**dimension drawing**

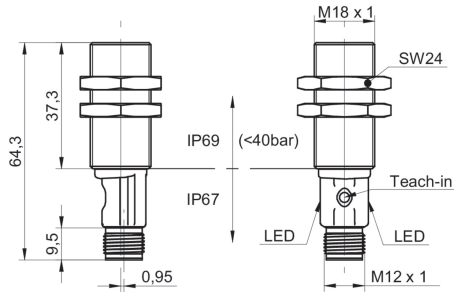

**connection diagram**

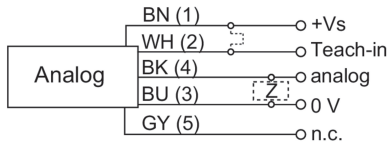

**pin assignment**

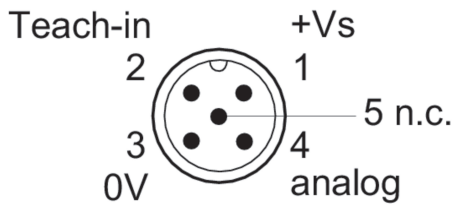

**typical sonic cone profile**

